


Trash Doors

TRASH CHUTE Intake Door

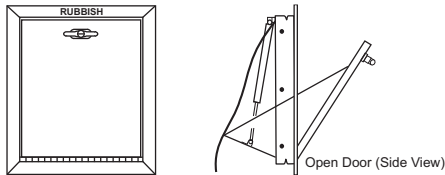


Doors are fabricated with 22 gauge type 304 stainless steel and stainless hinges. Doors are bottom hinged, self closing and self latching with a locking Tee handle. UL class B labeled: 1½ hour fire rated with 30-minute temperature rise of 250° F. Door trim embossed "RUBBISH".

RECOMMENDED DOOR SIZES

| Chute Size | Door Size W x H |
|--------------------|--------------------|
| 24" Diameter Chute | 15" x 18" Door |
| 30" Diameter Chute | 18" x 18" Door |
| 36" Diameter Chute | 21" x 18" Door |

TRASH CHUTE Discharge Door

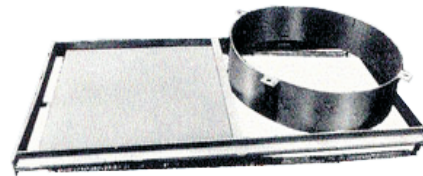


Horizontal rolling type discharge door assembly, required when chute discharges into an open container. Gravity rolling door held open with a UL approved 165° fusible link.

RECOMMENDED DOOR SIZES

| Chute Size | Door Size W x H |
|--------------------|--------------------|
| 24" Diameter Chute | 26½" x 50½" Door |
| 30" Diameter Chute | 32½" x 62½" Door |
| 36" Diameter Chute | 38½" x 74½" Door |

Linen Doors

LINEN CHUTE Intake Door

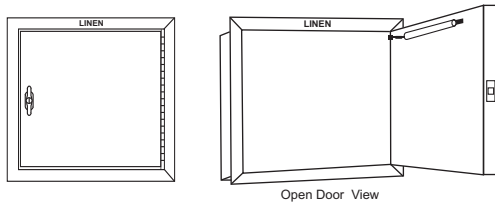

Doors are fabricated with 22 gauge type 304 stainless steel and stainless steel hinges. Doors are side hinged, self closing, and self latching with a locking Tee handle. UL class B labeled: 1½ hour fire rated with 30-minute temperature rise of 250° F. Door trim embossed "LINEN".

RECOMMENDED DOOR SIZES

| Chute Size | Door Size W x H |
|--------------------|--------------------|
| 24" Diameter Chute | 18" x 18" Door |
| 30" Diameter Chute | 21" x 21" Door |
| 36" Diameter Chute | 24" x 24" Door |

LINEN CHUTE Discharge Door



Top hinged stainless steel door panel held open with a UL approved 165° fusible link. Equipped with two positive latching handles, adjustable support legs, and drain assembly.

RECOMMENDED DOOR SIZES

| Chute Size | Door Size W x H |
|--------------------|--------------------|
| 24" Diameter Chute | 18" x 18" Door |
| 30" Diameter Chute | 21" x 21" Door |
| 36" Diameter Chute | 24" x 24" Door |