


Trash Doors

TRASH CHUTE Intake Door

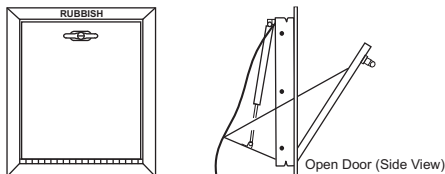


Doors are constructed entirely of type 304 stainless steel and stainless hinges. Doors are bottom hinged, self closing and self latching with a locking Tee handle. UL class B labeled: 1½ hour fire rated with 30-minute temperature rise of 250° F. Door trim embossed "RUBBISH".

RECOMMENDED DOOR SIZES

Chute Size	Door Size W x H
24" Diameter Chute	15" x 18" Door
30" Diameter Chute	18" x 18" Door
36" Diameter Chute	21" x 18" Door

TRASH CHUTE Discharge Door

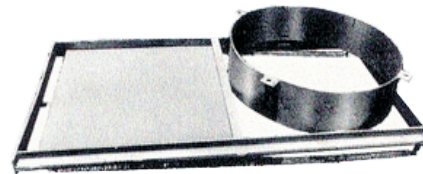


Horizontal rolling type discharge door assembly, required when chute discharges into an open container. Gravity rolling door held open with a UL approved 165° fusible link.

RECOMMENDED DOOR SIZES

Chute Size	Door Size W x H
24" Diameter Chute	26½" x 50½" Door
30" Diameter Chute	32½" x 62½" Door
36" Diameter Chute	38½" x 74½" Door

Linen Doors

LINEN CHUTE Intake Door

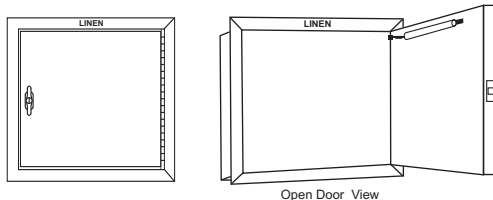

Doors are constructed entirely of type 304 stainless steel and stainless steel hinges. Doors are side hinged, self closing, and self latching with a locking Tee handle. UL class B labeled: 1½ hour fire rated with 30-minute temperature rise of 250° F. Door trim embossed "LINEN".

RECOMMENDED DOOR SIZES

Chute Size	Door Size W x H
24" Diameter Chute	18" x 18" Door
30" Diameter Chute	21" x 21" Door
36" Diameter Chute	24" x 24" Door

LINEN CHUTE Discharge Door



Top hinged stainless steel door panel held open with a UL approved 165° fusible link. Equipped with two positive latching handles, adjustable support legs, and drain assembly.

RECOMMENDED DOOR SIZES

Chute Size	Door Size W x H
24" Diameter Chute	18" x 18" Door
30" Diameter Chute	21" x 21" Door
36" Diameter Chute	24" x 24" Door